

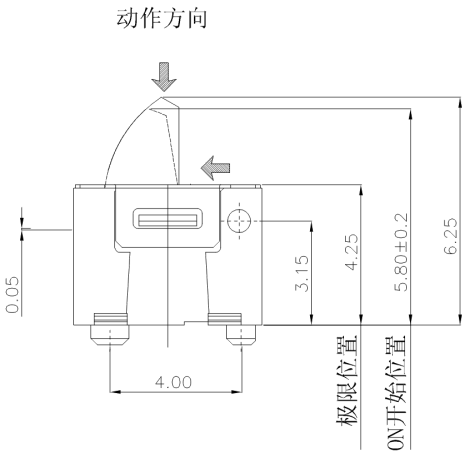


PCB LAND DIMENSION



技术要求:

1. 额定负荷: DC 12V 50mA
2. 绝缘电阻: $\geq 100M\Omega$
3. 耐电压: AC100V 50Hz/1min
4. 电器寿命: 50000次
5. 环境温度: $-10^{\circ} \sim +60^{\circ}$
6. 相对湿度: $40^{\circ}C \leq 95\%$
7. 接触电阻: $\leq 100M\Omega$
8. 接触行程: 0.5 ± 0.2
9. 动作力: 30gf



CIRCUIT DIAGRAM

⑤	Contact Spring	—	1	SUS	Natural	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	PA66	Black	—
②	Cover	—	1	SUS	Black	—
①	Knob	—	1	POM	Black	—

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK		
APPROVALS			DATE	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
DRAWN	J.X.Zhang	2018/8/1						
CHECKED			TITLE: DETECTOR SWITCHES					
APPROVALS			PART NO. K5-1673SA-01					
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
		10~30	±0.20					
		5~10	±0.15					
		~ 5	±0.10					
		±2°	DRAWING NO.	_____	SHEET 1 OF 1			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			