
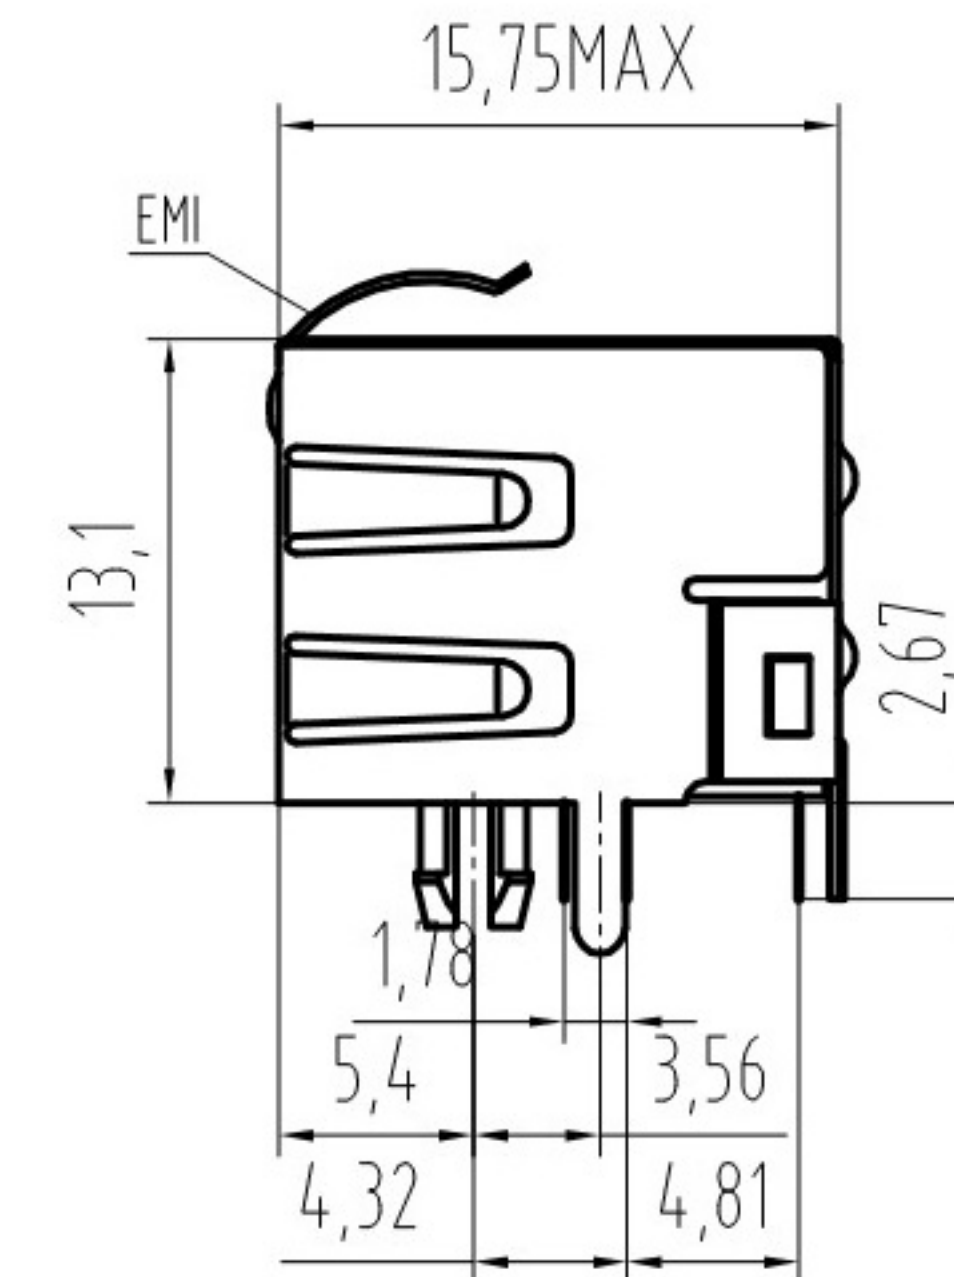


RoHS

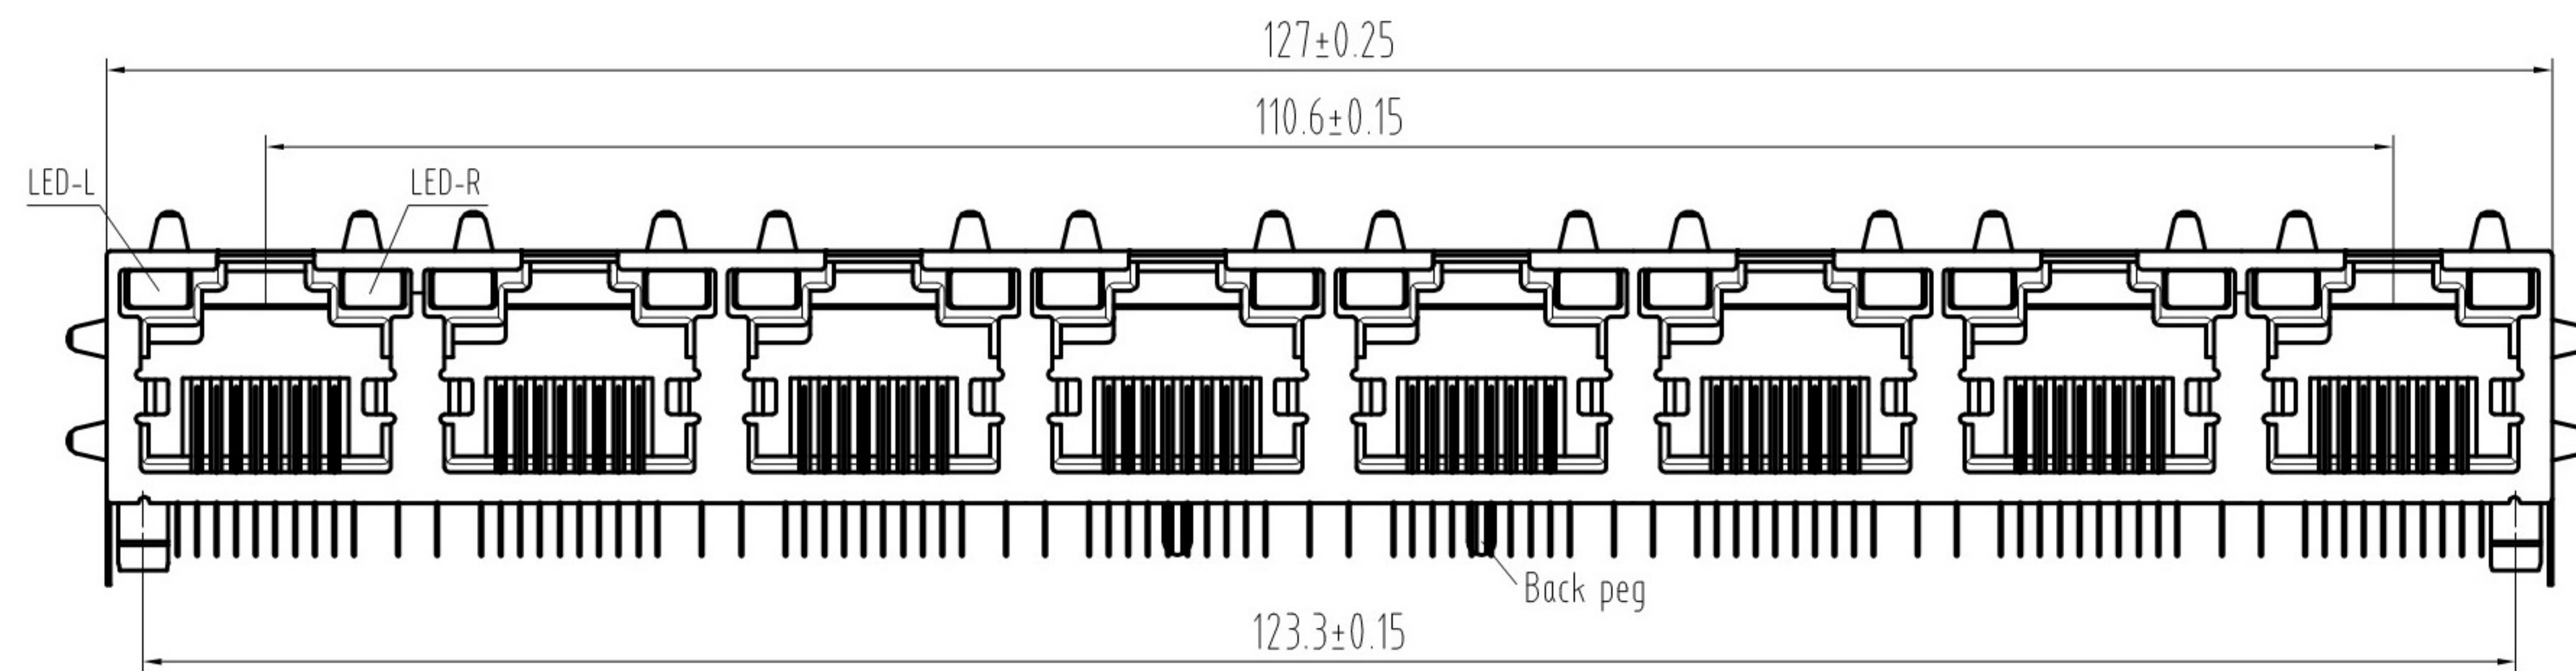

PC Board Layout
Component Side Shown

NOTES:

MATERIAL:

- | | |
|---------------------|--|
| 1. HOUSING MATERIAL | : GLASS FILLED POLYESTER UL94V-0. |
| 2. CONTACT MATERIAL | : PHOSPHOR BRONZE $\phi 0.46\text{mm}$. |
| 3. PLATING | : GOLD PLATING OVER NICKEL. |
| 4. SHIELD | : 0.23mm THICKNESS COPPER ALLOY WITH NICKEL PLATED |
| 5. LED | : OPTION |

ELECTRICAL:

- | | |
|---------------------------------------|------------------------------|
| 1. VOLTAGE RATING | : 125 VAC RMS. |
| 2. CURRENT RATING | : 15 AMP. |
| 3. CONTACT RESISTANCE | : 30 MILLIOHMS MAX. |
| 4. INSULATION RESISTANCE | : 500 MEGOHMS MIN @ 500V DC. |
| 5. DIELECTRIC WITHSTANDING RESISTANCE | : 1000V AC RMS 50Hz 1MIN. |


MECHANICAL:

- | | |
|-----------------------------|-------------------|
| 1. DURABILITY | : 750 CYCLES MIN. |
| 2. PCB RETENTION PRE-SOLDER | : 1 LB MIN. |

ENVIRONMENTAL:

- | | |
|--------------|---------------|
| 1. STORAGE | : -40°C~+85°C |
| 2. OPERATION | : 0°C TO 70°C |

PART NUMBER:

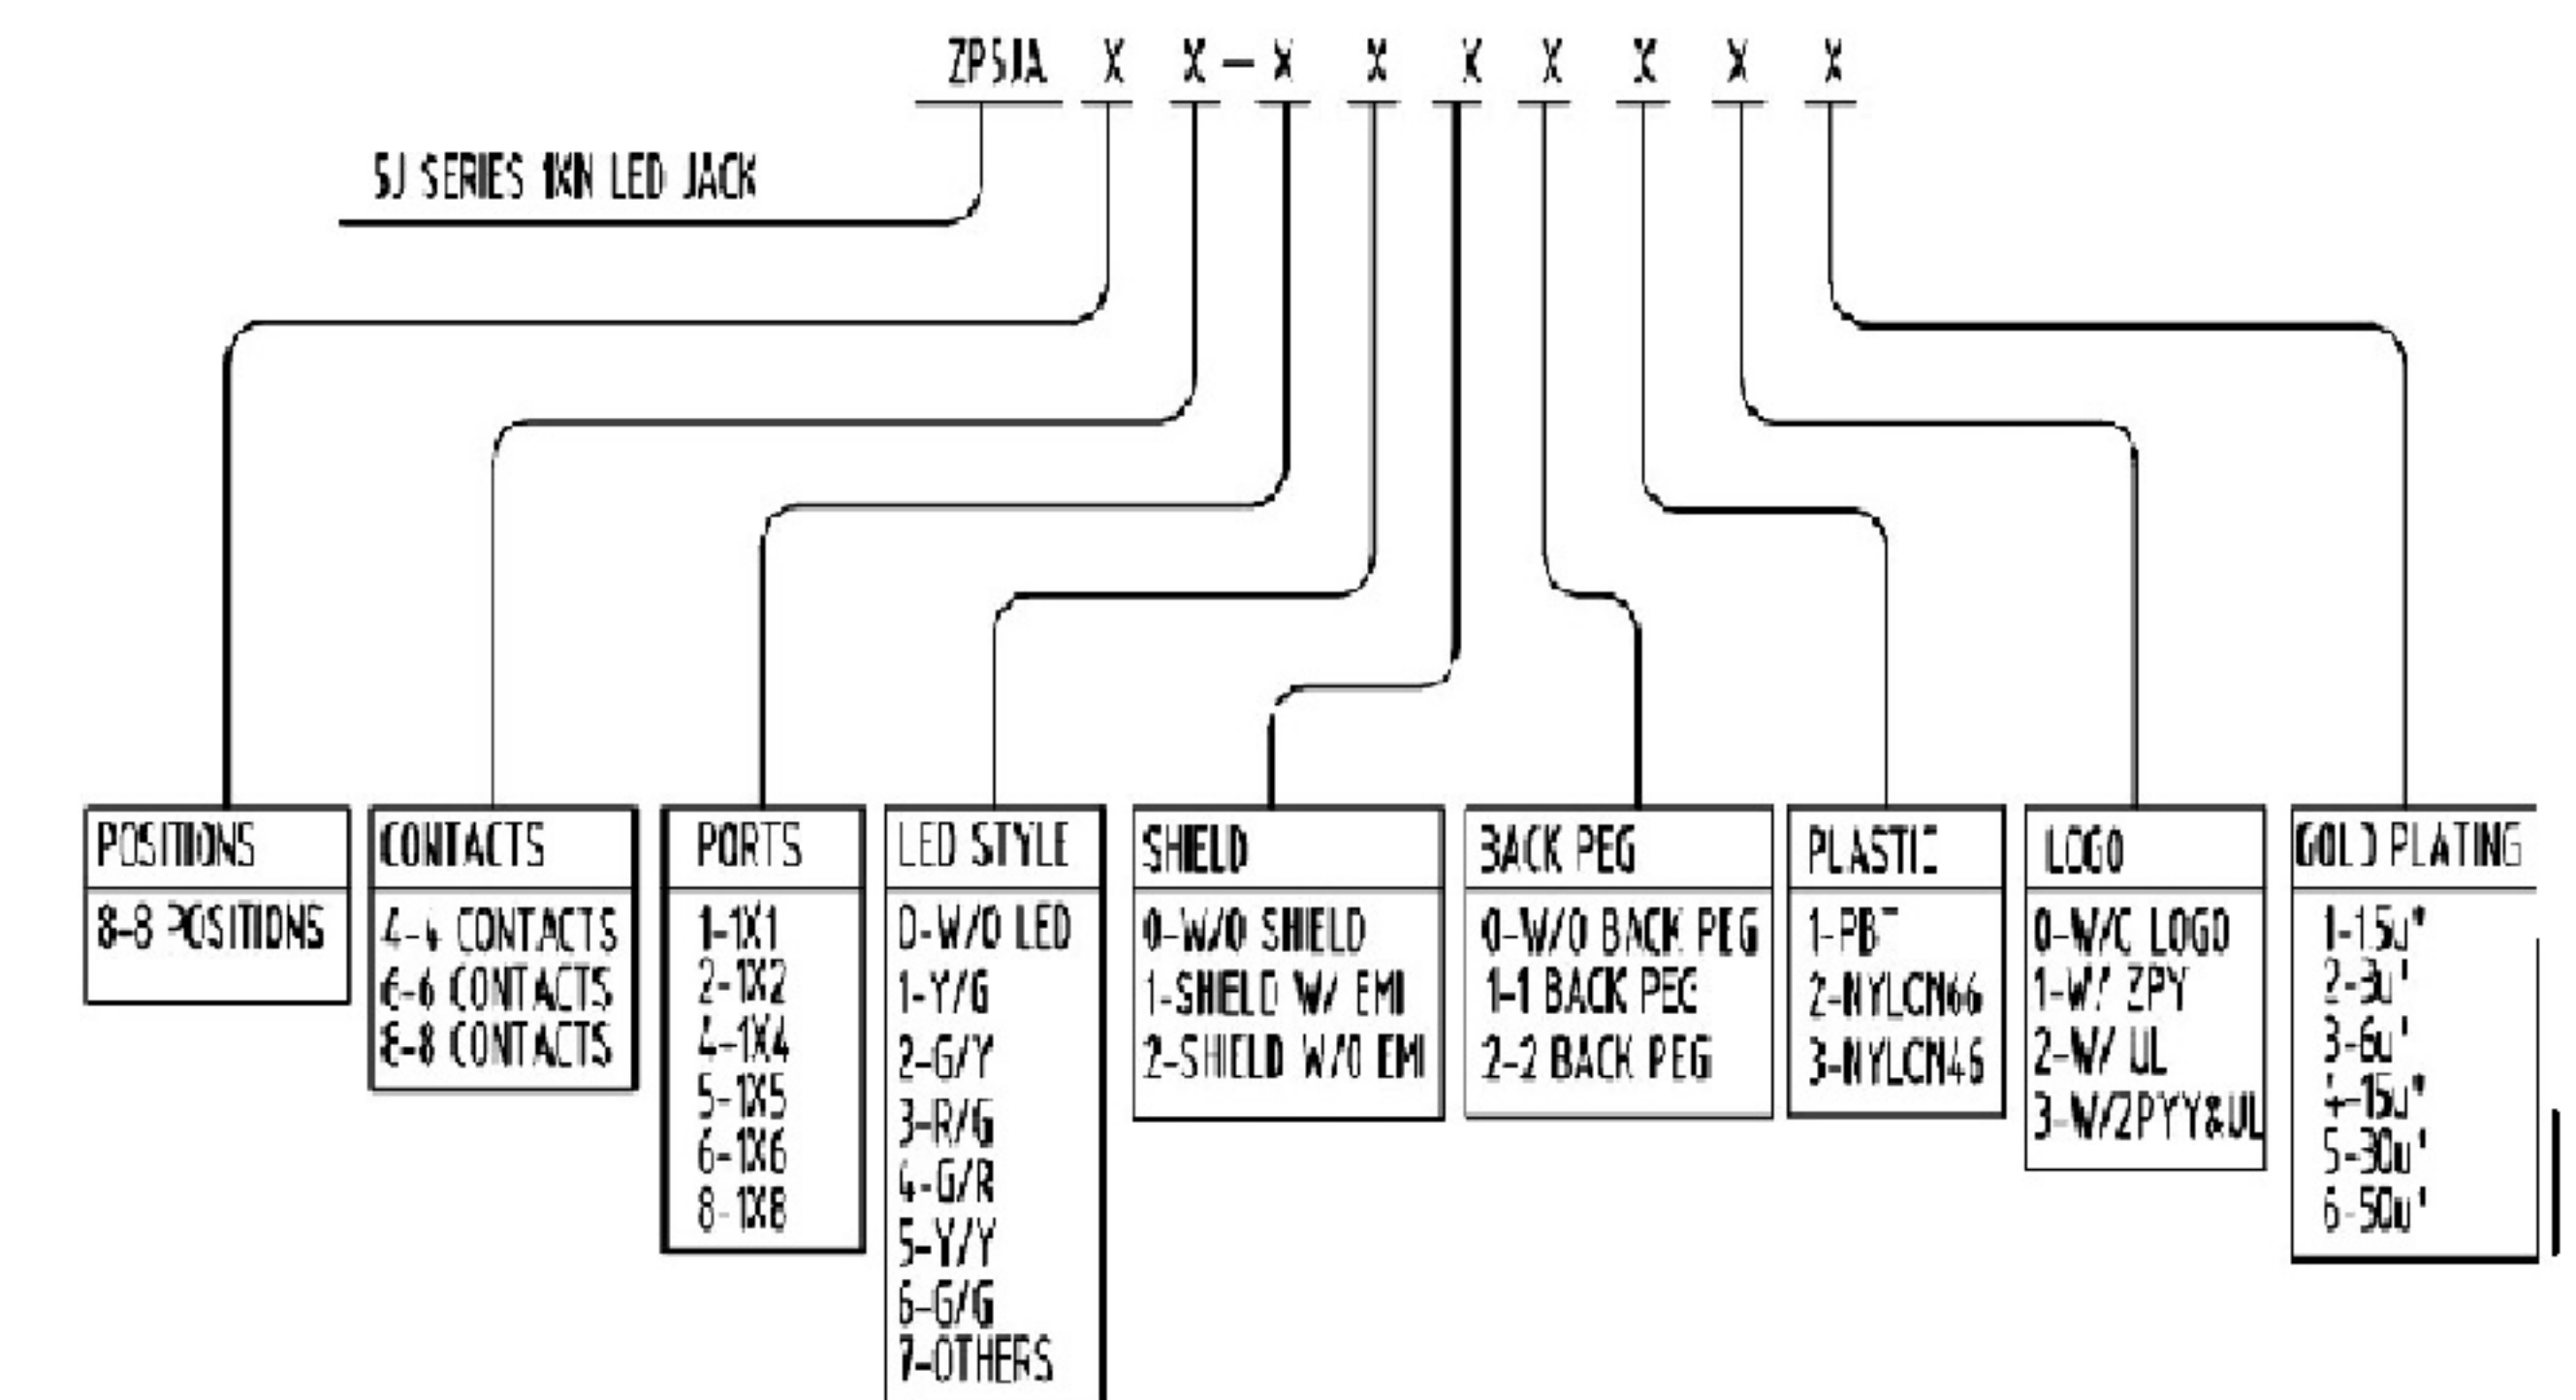

PC Board Layout
Component Side Shown

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

Address: China, Dongguan City, Guangdong Province, Huang Jiang
TLE: 0769-82055138 0769-82056828
E-mail: XB@ALPSR.CN E-mail: CN@ALPSR.CN
Website: www.alpsr.cn www.alpsr.com

TITLE:
RJ45

PART NO.:


REMARK:

SIZE
A4

UNITS
MM[INCH]

SACLE
1:1

SHEET
1/2

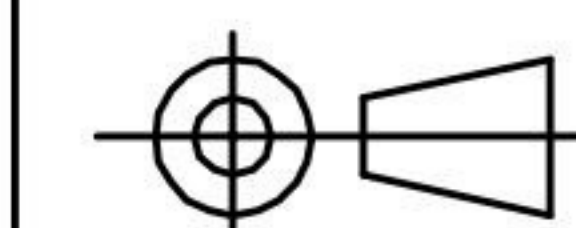

GENERAL TOLERANCES
UNLESS SPECIFIED

$x \pm 0.35$	$x^\circ \pm 3.0^\circ$
$.x \pm 0.30$	$.x^\circ \pm 2.0^\circ$
$.xx \pm 0.25$	$.xx^\circ \pm 1.5^\circ$
$.xxx \pm 0.10$	$.xxx^\circ \pm 1.0^\circ$

APPROVED BY:
JP.Gong

CHECKED BY:
TW.Xu

DESIGND BY:
ZG.Hu