

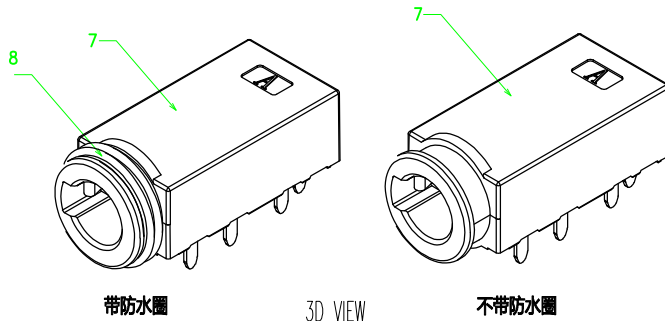

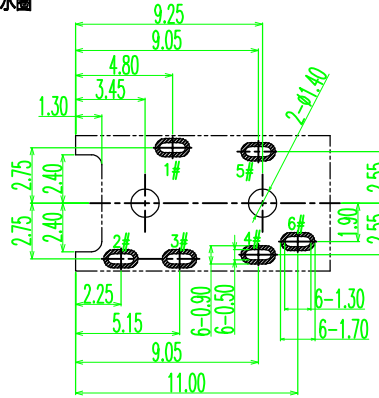


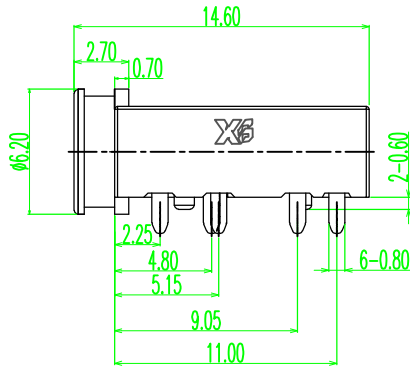


3D VIEW

不带防水圈




P.C.B LAYOU T=1.00mm
TOP VIEW



1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IP67;

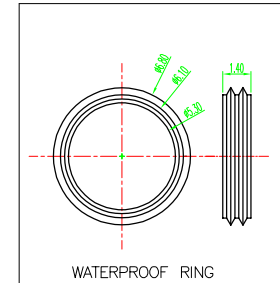

WATERPROOF RING

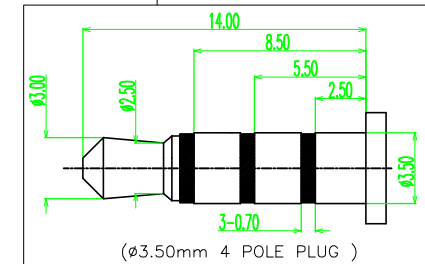

(ø3.50mm 4 POLE PLUG)

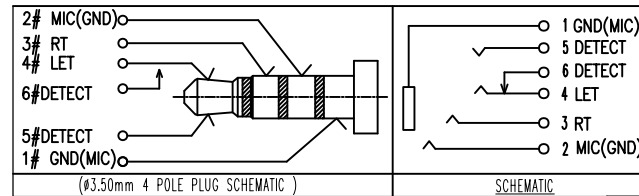


9	COVER	1	HIGH TEMPERATURE PLASTIC MATERIALE; COLOR BLACK	
8	WATERPROOF RING	1	SILICA GEL	
7	HOUSING	1	HIGH TEMPERATURE PLASTIC MATERIALE; COLOR BLACK	
6	TERMINAL 6#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
5	TERMINAL 5#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
4	TERMINAL 4#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
3	TERMINAL 3#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
2	TERMINAL 2#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL;GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
1	TERMINAL 1#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL;GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
ITEM	NAME	QTY	DESCRIPTION	NOTE

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:	ANGLES:	DESIGN:	Tony	PART NAME:
DIM	TOL	DIM	TOL	2021.5.21
X.	±0.50	X.	±2°	Φ3.5 PHONE JACK
X.X	±0.30	X.X	±1°	
X.XX	±0.20	X.XX	—	PART NO.
X.XXX	±0.10	X.XXX	—	XB-PJW3506-0848-00000H
3RD ANGLE PROJECTION	UNIT: mm	CHECK:		SHEET: 1/1
		APPROVED	Andy	REV.: A1
			2021.5.21	DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

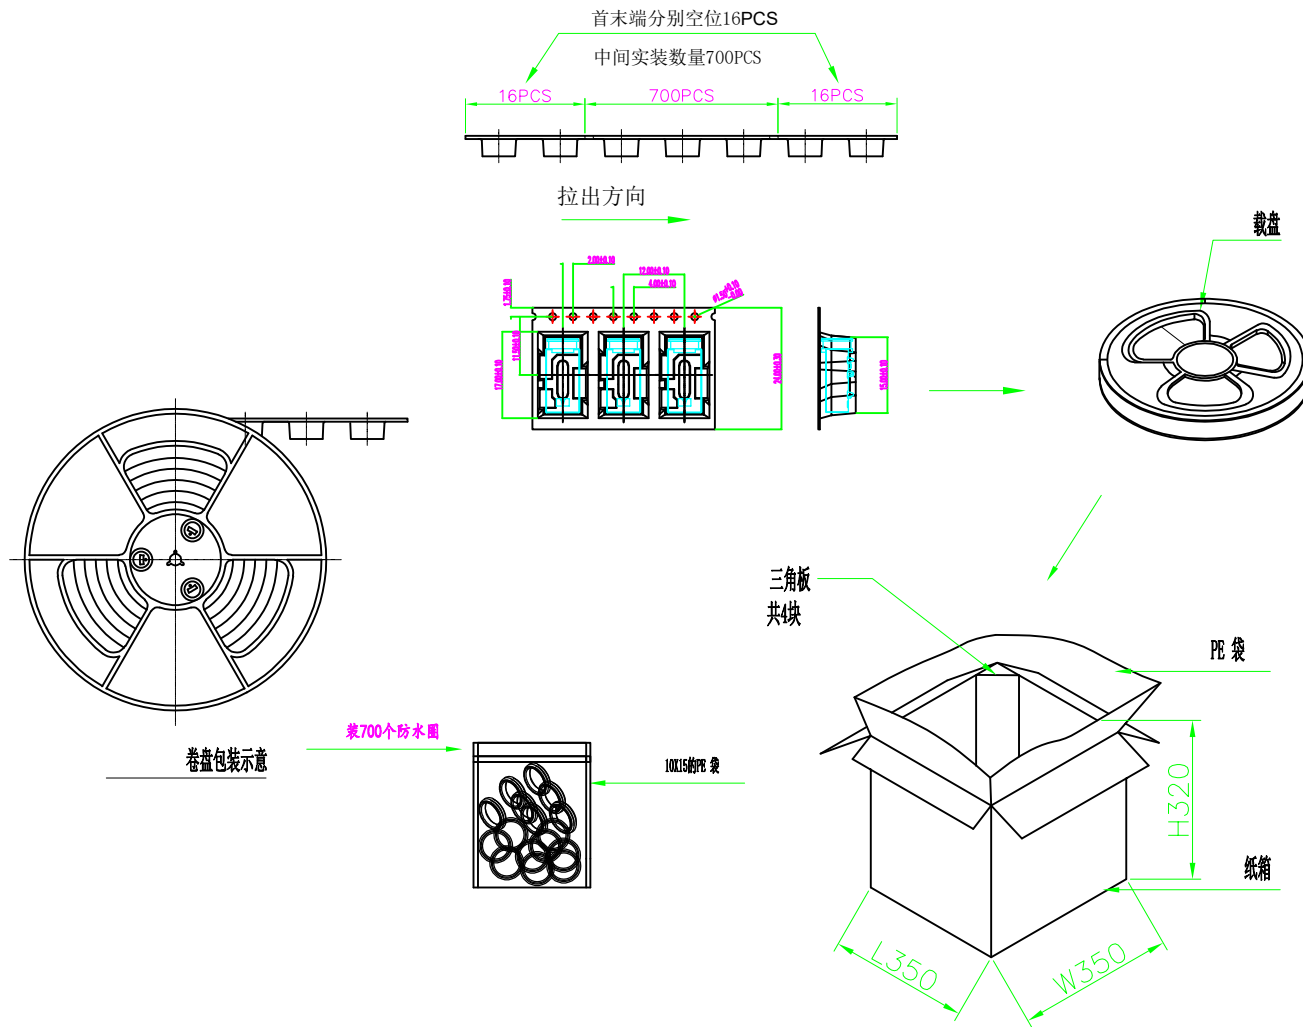

1载带=700PCS
1外箱=700PCSX10盘载带=7000PCS

UNLESS OTHERWISE SPECIFIED TOLERANCES				XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DECIMALS:		ANGLES:		DESIGN:	Tony
DIM	TOL	DIM	TOL		2021.5.21
X.	±0.50	X.	±2°	CHECK:	PART NAME: Φ3.5 PHONE JACK — 包装图
X.X	±0.30	X.X	±1°		
X.XX	±0.20	X.XX	—		
X.XXX	±0.10	X.XXX	—		
 3RD ANGLE PROJECTION				APPROVED	Andy
UNIT: mm					2021.5.21
					PART NO. XB-PJW3506-0848-00000H
					SHEET: 1/1 REV.: A1
					DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------