

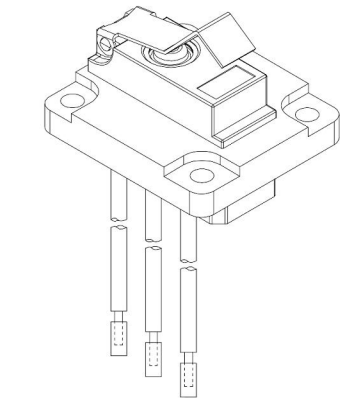
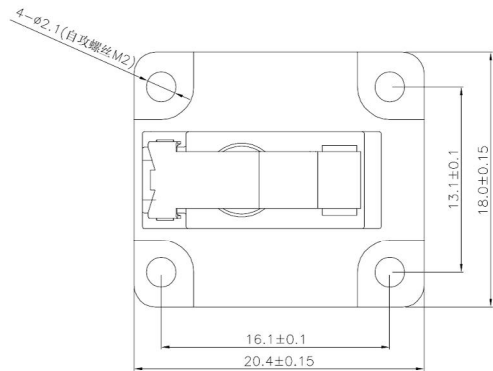


ROHS Waterproof IP67

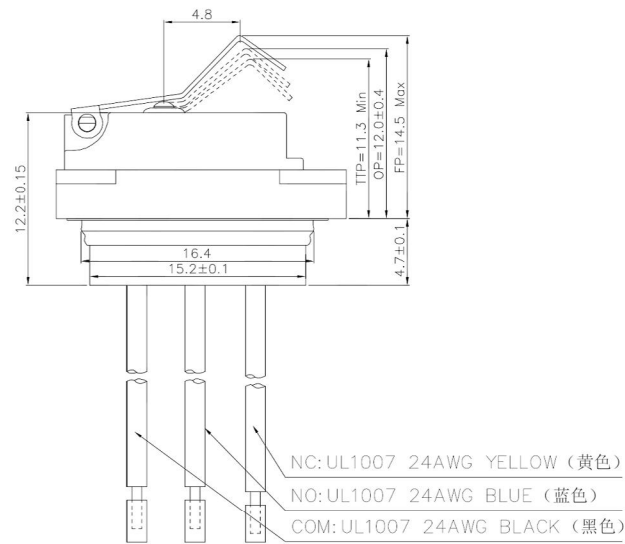


Press	黑-黄	R=3520Ω
	黑-蓝	R=20Ω
	蓝-黄	R=3520Ω
Free	黑-黄	R=220Ω
	黑-蓝	R=无穷大
	蓝-黄	R=无穷大

NOTE:

- Rating1:DC 30V 3A
- Rating2: 30V DC/125V AC/250V AC 0.1A
- Operating froce:100gf MAX
- Electric Life:10,000
- Mechanical Life:300,000
- Ingress protection:IP67

The material contained in this drawing is the property of XiBang. Any use other than that specifcally authorized by XiBang i5 prohibited. The above drawing IS subjected to change for improvement without prior notice.

⑦	Shrapnel	—	1	Brass	Plating silver	—
⑥	Contact	—	1	Ag	—	—
⑤	Sealed Circle	—	1	Silicone Rubber	—	—
④	Terminal	—	2	Brass(0.50t)	Plating silver	—
③	Plunger	—	1	POM	Black	—
②	Case	—	1	PA	Black	—
①	Cover	—	1	PA	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

	东莞市溪榜电子有限公司														
	DONG GUAN XI BANG ELECTRONICS CO., LTD														
	TITLE : XB MICRO SWITCH														
MODEL : XB-FS-MS-2921W															
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE	ANGLE TOL								
SCALE : 5 : 1		CHK'D	PENG. GAO	DATE		<= 1.5mm ± 0.1									
						> 1.5mm ± 0.2									
VERSION		01	APPD.	FEI. LONG. HE	DATE	>=10mm ± 0.3									
								7	LEVER	SUS		1	NATURE		
								6	CONTACT POINT	SILVER		1	NATURE		
								5	SPRING PLATE	CuBe		1	NATURE		
								4	TERMINAL	BRASS STRIP		3	Ag PLATED		
								3	BASE	PBT		1	WHITE		
								2	COVER	PBT		1	BLACK		
								1	BUTTON	POM		1	WHITE		
								NO.	PART NAME	MATERIAL		QTY.	FINISHING		


ROHS

XB-FS-MS-2931

Waterproof IP67

名称
防水微动开关


编码	线材长度L	编码	线材长度L
0	无线材省略	C	250mm
A	150mm	D	300mm
B	200mm	其它	...

编码	图示	产品规格
2		20.4*18.0*12.2

流水号	电线规格	流水号	电线规格
0	无线材省略	5	0.14mm2*6C
1	UL1007 22AWG美标	6	UL1007 24AWG美标
2	AVSS0.3日标	7	特氟龙24AWG
3	AVSS0.5日标	8	VW-1 1015 20AWG
4	UL1007 20AWG美标	9	UL2468 24AWG VW-1 80℃


编码	额定负载
1	3A 12V DC
	0.1A 125/250V AC
	0.1A 48V DC
2	10(1.5)A 250V AC

编码	手柄类型
T	
N	无手柄

编码	端子类型
W	

编码	触点类型
D	常开/常闭 SPDT
B	常开 SPST-NO
C	常闭 SPST-NC

The material contained in this drawing is the property of XiBang. Any use other than that specifcally authorized by XiBang i5 prohibited. The above drawing IS subjected to change for improvement without prior notice.

		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD					 							
		TITLE : XB MICRO SWITCH												7
MODEL : XB-FS-MS-2921W										6	CONTACT POINT	SILVER	1	NATURE
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE ≤ 1.5mm ± 0.1 > 1.5mm ± 0.2 ≥ 10mm ± 0.3	ANGLE TOL ± 2°	5	SPRING PLATE	CuBe	1	NATURE		
SCALE : 5 : 1		CHK'D	PENG. GAO	DATE				4	TERMINAL	BRASS STRIP	3	Ag PLATED		
VERSION		01	APPD.	FEI. LONG. HE	DATE				3	BASE	PBT	1	WHITE	
									2	COVER	PBT	1	BLACK	
								1	BUTTON	POM	1	WHITE		
								NO.	PART NAME	MATERIAL	QTY.	FINISHING		