
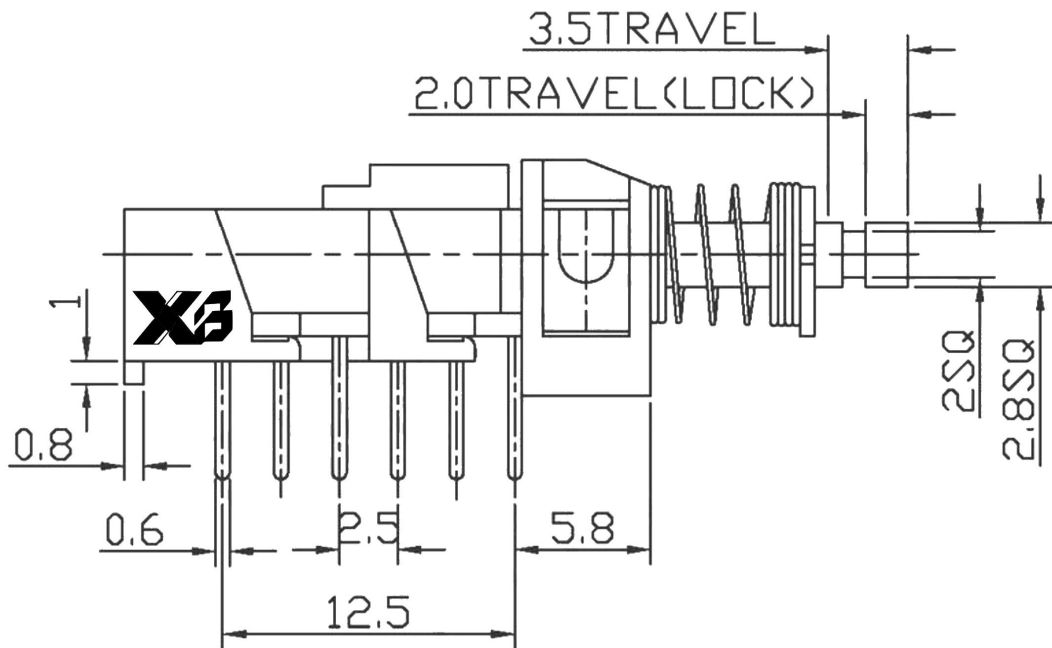

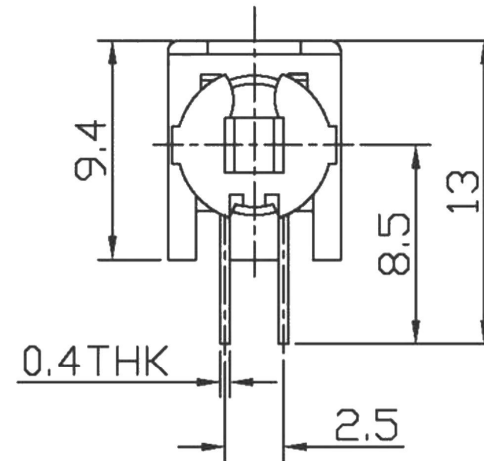


ROHS

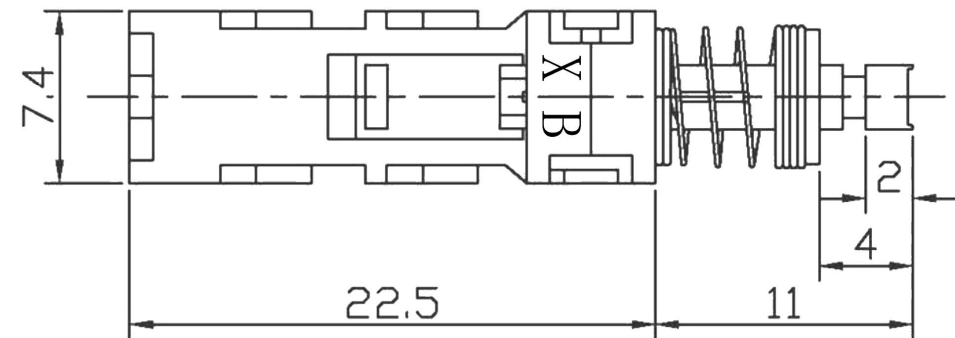

ITEM: PERFORMANCE

Title: PUSH BUTTOMN SWICH

Model: XB-PBS-42D02

Rating: 0.3A 0.5A 12V 30V DC

Function: 4P2T

Timing: Non-shorting

ContactResistance (mohms) : 50mΩ max

Insulation Resistanc(Mohms):100M Ω min at 500V DC

Dielectric Strength(V):AC 500V for 1 min


LifeTest:10,000 Cycles



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : PUSH BUTTON SWITCH

MODEL : PBS42D02 (W009)



TOLERANCE

 $\leq 1.5\text{mm} \pm 0.1$
$$> 1.5\text{mm} \pm 0.2$$

ANGLE TOL	
-----------	--

 $\pm 2^\circ$

10	COVER	POM	1	BLACK
9	SPRING	STEEL WIRE	1	NATURE
8	CAM STICK	BRASS STRIP	1	NATURE
7	BLOCK	PBS STRIP	1	NATURE
6	SPRING PLATE	IRON STRIP	1	Ni PLATED
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT SLIP	PBS STRIP	4	Ag CLAD
3	HOUSING	PC	1	BLACK
2	TERMINAL	BRASS STRIP	12	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING