

F

E

D

C

B

A



Specifications

Current Rating:1.0Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:300VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C

Materials

Contact Material:Phosphor Bronze

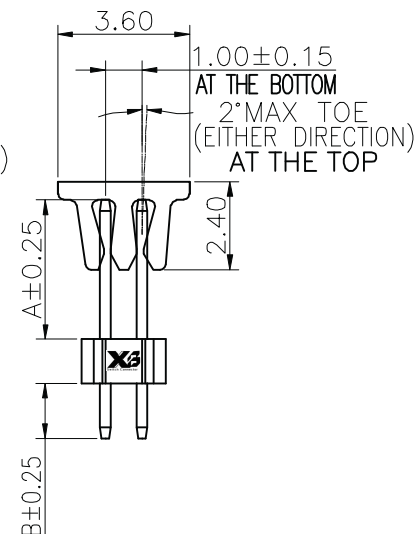
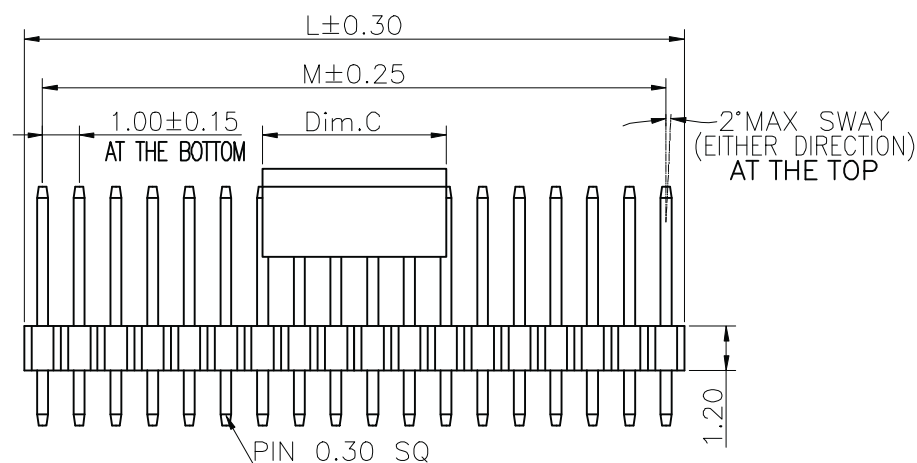
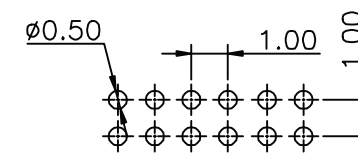
Insulator Material:High Temperature

Thermoplastic, UL 94V-0 LCP

or the equivalent material

All materials must meet XI BANG

hazardous substances control standards.

Recommended P.C.Board
Layout
(Tolerance:±0.05)

Dim.C	NOTE
3.00mm	03~04Pins
5.00mm	05~40Pins

No. of PIN/ROW	Dimension Information	
	M	L
02	1.00	2.00
03	2.00	3.00
04	3.00	4.00
05	4.00	5.00
06	5.00	6.00
07	6.00	7.00
08	7.00	8.00
09	8.00	9.00
10	9.00	10.00
11	10.00	11.00
12	11.00	12.00
13	12.00	13.00
14	13.00	14.00
15	14.00	15.00
16	15.00	16.00
17	16.00	17.00
18	17.00	18.00
19	18.00	19.00
20	19.00	20.00
21	20.00	21.00
22	21.00	22.00
23	22.00	23.00
24	23.00	24.00
25	24.00	25.00
26	25.00	26.00
27	26.00	27.00
28	27.00	28.00
29	28.00	29.00
30	29.00	30.00
31	30.00	31.00
32	31.00	32.00
33	32.00	33.00
34	33.00	34.00
35	34.00	35.00
36	35.00	36.00
37	36.00	37.00
38	37.00	38.00
39	38.00	39.00
40	39.00	40.00

Ordering Information

201	-	XX	XX	A	XXX	C	1	S	X
Plastic specifications 1=Single row 2=Dual row 3=Tripe row 4=Quadruple	Water code No. of Pins per Row 02~40	Positioning column information A=No locating post B=Round post C=Square post	Pin length See the drawing	Insulator Material R=Nylon(Halogen Free) C=LCP	Color 1=Black 2=White 3=Yellow E=Beige	Contact Material A/S/K/T=Phosphor Bronze	Packing code A=Box C=Tube D=Tape&Reel E=Cap+Tube F=Cap+Tape&Reel		

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE

X'±5.0'	X±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DWG. NO.

XB-PZ-A-10-201

PART NO.

XB-PZ-A-10-201

TITLE.

1.00 PIN HEADER
DUAL ROW DIP TYPE
CONNECTOR

F

E

D

C

B

A